

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
13 November 2003 (13.11.2003)

PCT

(10) International Publication Number
WO 03/094554 A1

- (51) International Patent Classification⁷: **H04Q 7/22**
- (21) International Application Number: **PCT/US03/13171**
- (22) International Filing Date: **30 April 2003 (30.04.2003)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
60/377,036 **1 May 2002 (01.05.2002)** **US**
- (71) Applicant: **INTERDIGITAL TECHNOLOGY CORPORATION [US/US]; 300 Delaware Avenue, Suite 527, Wilmington, DE 19801 (US).**

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


- (72) Inventor: **TERRY, Stephen, E.; 15 Summit Avenue, Northport, NY 11768 (US).**
- (74) Agents: **VOLPE, Anthony, S. et al.; Volpe and Koenig, P.C., United Plaza, Suite 1600, 30 South 17th Street, Philadelphia, PA 19103 (US).**

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **POINT TO MULTI-POINT SERVICES USING HIGH SPEED SHARED CHANNELS IN WIRELESS COMMUNICATION SYSTEMS**

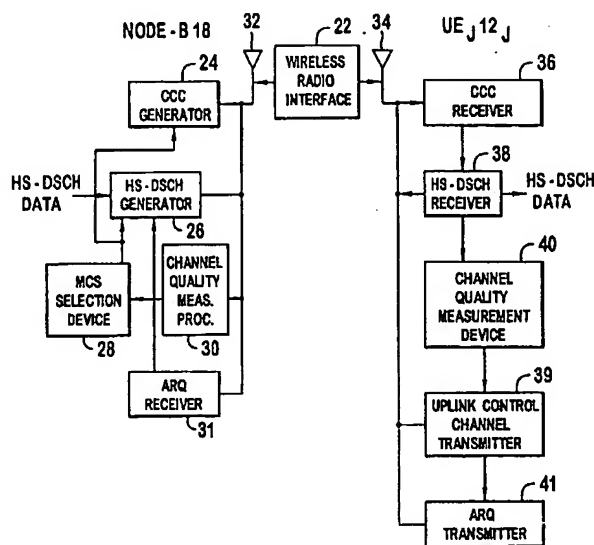

(57) Abstract: Service data is transferred in a wireless communication system. A first service identification is transmitted for reception by a group of users of a cell in the system. The group of users does not include all of the users of the cell. Each of the group of users receives the service identification. Each of the group of users monitors for a second service identification being transmitted over a high speed downlink shared channel (HS-DSCH) see description of elements 26 and 38). The service data is transmitted over the HS-DSCH with the second service identification. Each of the group of users (see description of element UEj12j) detects the second service identification and receives the service data of the HS-DSCH.

WO 03/094554 A1

[0001] POINT TO MULTI-POINT SERVICES USING HIGH SPEED SHARED
CHANNELS IN WIRELESS COMMUNICATION SYSTEMS

[0002] FIELD OF INVENTION

[0003] The invention generally relates to wireless communication systems. In particular, the invention relates to point to multi-point services in such systems.

[0004] BACKGROUND

[0005] There is a growing desire to use point to multi-point services in wireless communication systems. As shown in Figure 1 in point to multi-point, one service is sent from a single point, such as a base station, to multiple points, such as user equipments. Examples of point to multi-point services are multimedia broadcasts and multicast services.

[0006] In the third generation partnership program (3GPP) proposed system, one proposed channel that could be used for such services is the forward access channel (FACH). The FACH is a downlink common transport channel (TrCH) that can be received by all users. The FACH TrCH is broadcast by applying it to the secondary common control physical channel (S-CCPCH). The S-CCPCH is transmitted to all the cell users.

[0007] To limit the radio resources allocated to the S-CCPCH, the S-CCPCH data rate is limited. To illustrate, if a high data rate service was transmitted over the S-CCPCH, it would need to be transmitted using a low data redundancy to achieve that high data rate. Since the S-CCPCH is transmitted to the entire cell, it is transmitted at a power level sufficient for reception by a user at the periphery of the cell at a desired quality of service (QOS). Broadcasting a high data rate service at this power level would increase interference to other users reducing the capacity of system, which is extremely undesirable.

[0008] Due to the broadcast nature of the S-CCPCH and FACH, the radio resources required for the S-CCPCH and FACH are rather static. The modulation and

coding set (MCS) and transmission power level used by the S-CCPCH needs to be sufficient to maintain a desired QOS at the periphery of the cell.

[0009] A shared channel proposed for use in the 3GPP system is the high speed downlink shared channel (HS-DSCH). The HS-DSCHs are high speed channels which are time shared by the cell users (user equipments). Each transmission is targeted to a separate user and each user's transmission over the HS-DSCH is separated by time.

[0010] The HS-DSCH transmissions to a user are associated with an uplink and a downlink dedicated control channels. Each user sends measurements via layer 1 and layer 3 signaling in the uplink control channel. Using these measurements, a modulation and coding set (MCS) is selected for that user's transmissions. The MCS can be changed every 2 to 10 milliseconds. By carefully selecting the MCS for the user transmissions, the least robust (lowest data redundancy) MCS can be selected to maintain the desired quality of service (QOS). As a result, the radio resources are more efficiently utilized.

[0011] To determine when a particular user's transmission is being sent over the HS-DSCH, that user first searches on the set of downlink control channel for its UE ID encoded in a cyclic redundancy code (CRC) and decodes the downlink control channel for HS-DSCH allocation information. After a predetermined period, the UE receives the HS-DSCH for a packet having its UE ID and decodes that packet for reception of user data.

[0012] Although the HS-DSCH allows for a more efficient utilization of radio resources, only point to point services can be handled by the HS-DSCH. To handle multiple reception points, multiple transmissions must be made over the HS-DSCH. Such multiple transmissions utilize a large amount of radio resources, which is undesirable.

[0013] Accordingly, it is desirable to have a flexible mechanism to provide point to multi-point services.

[0014] SUMMARY

[0015] Service data is transferred in a wireless communication system. A first service identification is transmitted for reception by a group of users of a cell in the system. The group of users does not include all of the users of the cell. Each of the group of users receives the service identification. Each of the group of users monitors for a second service identification being transmitted over a high speed downlink shared channel (HS-DSCH). The service data is transmitted over the HS-DSCH with the second service identification. Each of the group of users detects the second service identification and receives the service data of the HS-DSCH.

[0016] BRIEF DESCRIPTION OF THE DRAWING(S)

[0017] Figure 1 is an illustration of a point to multi-point service.

[0018] Figures 2 are illustrations of a preferred HS-DSCH and associated control channels.

[0019] Figure 3 is simplified diagram of a preferred Node-B and user equipment.

[0020] Figure 4 is a simplified diagram of a preferred Node-B with a scheduling mechanism for the preferred HS-DSCH.

[0021] Figure 5A and 5B are illustrations of preferred HS-DSCH signaling for the HS-DSCH.

[0022] Figure 6 is an illustration of preferred signals for establishment and transmission of a point to multi-point service over a HS-DSCH.

[0023] Figure 7 is an illustration of channel mapping performed by the radio network controller and the user equipment for a point to multi-point service over a HS-DSCH.

[0024] DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT(S)

[0025] Although the preferred embodiments are described in conjunction with a preferred 3GPP proposed system, they can be utilized with other wireless systems using point to multi-point transmissions.

[0026] Figure 2 is an illustration of a preferred HS-DSCH 16 and its associated downlink control channel(s) 13 for use in transmitting a point to multi-point (PtM) service. In Figure 2, a group of users, UE 1 12₁, ..., UE J 12_J, ..., UE N 12_N, are to receive the service over the HS-DSCH 16. A downlink common control channel (CCC) 13 is utilized to allocate the HS-DSCH 16 for the users, UE 1 12₁, ..., UE J 12_J, ..., UE N 12_N. The HS-DSCH 16 is sent by a base station 10 and is received by the group of UEs 12₁-12_N. UEs, such as UE X 12_X, not registered for the service do not match the service identifier on the CCC 13. Therefore, this UE, UE X 12_X, is not configured to receive data of the HS-DSCH 16.

[0027] Figure 3 is a simplified diagram of a Node-B 18 and one of the UEs, UE J 12_J, for use in transferring data over the HS-DSCH 16. At the Node-B 18, a downlink control channel generator 24 produces the CCC signal for each UE 12₁-12_N. For a UE J 12_J, after the CCC 13 is radiated by an antenna 32 or antenna array through the wireless radio interface 22, it is received by an antenna 34 or an antenna array of the UE J 12_J and processed by a CCC receiver 36 to recover control information of the channel, such as a modulation and coding set of the HS-DSCH 16.

[0028] A HS-DSCH generator 26 produces the HS-DSCH signal for transfer through the wireless interface 22. The HS-DSCH signal is received by the UE J 12_J using its antenna 34 or antenna array. Information of the HS-DSCH 16 is recovered using the CCC information by a HS-DSCH receiver 38. A channel quality measuring device 40 takes channel quality measurements/information of the HS-DSCH, such as the signal to interference ratio (SIR) or block error rate (BLER). Channel quality can also be derived from the downlink associated dedicated channel. The measurements/information is sent to the Node-B 18, by an uplink physical control

[0029] Additionally, an automatic repeat request (ARQ) transmitter 41 at the user equipment 12 transmits acknowledgments (ACKs) and negative ACKs (NAKs) indicating whether the HS-DSCH information was received successfully. A ARQ receiver 31 at receives the ACK and NAKS. If a NAK is received by any of the HS-DSCH transmission users, the HS-DSCH transmission is typically repeated. The Node-B 18 checks the ACKs/NAKs for all users. Typically, if any user sends a NAK, a retransmission is made. However, a retransmission may only be triggered if only a number of NAKs exceeding a threshold is met. Typically, time limits are set for retransmissions. Preferably, the UEs 12 ACKing ignore subsequent retransmissions saving their power.

[0030] A channel quality measurement processor 30, at the Node-B 18, recovers the channel quality measurements/information from all the users of the HS-DSCH. A modulation and coding set (MCS) selection device 28 uses the channel measurements/information from each of the users registered to receive the PtM service (user group) to select a MCS for the HS-DSCH transmission. Preferably, the selected MCS is the least robust (highest data rate) that the channel conditions permit for the user within this PtM user group having the poorest received measured HS-DSCH signal quality. Preferably, the MCS is updated every transmission time interval (TTI), although a longer time period can be used. The CCC generator 24 produces the CCC indicating the selected MCS to UE 1 12₁, ..., UE J 12_J, ..., UE N 12_N for proper reception of the HS-DSCH. The HS-DSCH generator 26 produces the HS-DSCH 16 using the selected MCS.

[0031] For services having multiple sub-streams of data, the transmission characteristics of the various sub-streams may be handled separately. To illustrate, a multimedia service may have an audio, video and text sub-streams. The QOS of each sub-stream may differ allowing different transmission attributes to be used by each sub-stream. This approach allows for better resource efficiency. Instead of transmitting each sub-stream to meet the highest QOS sub-stream requirements, they

can be handled separately. The block error rate (BLER) is compared to a BLER quality target for each sub-stream.

[0032] Figure 4 is a simplified block diagram of a preferred scheduling mechanism for the Node-B 18. The scheduling mechanism 46 is preferably used to schedule data every TTI, although a longer scheduling period may be used. The scheduling mechanism 46 receives point to point (PtP) and PtM data to be transmitted over the HS-DSCH. The scheduler is determining which users will receive PtP transmissions and which user groups will receive PtM transmissions in the next TTI.

[0033] Scheduling the transfer of data over the preferred time period allows for a more efficient utilization of radio resources. To illustrate, in a particular TTI little data may be available for dedicated PtP transmissions. The scheduling mechanism 46 may increase the amount of PtM data transmitted through the HS-DSCH channel due to the increased availability of the radio resources in that TTI. Similarly, the scheduler 46 may choose to transmit PtP services when PtM data is not available. Another scheduling criteria is QoS attributes, such as transmission latency and/or data throughput requirements of the PtP or PtM service. Scheduling on a TTI basis offers a greater ability to achieve these requirements while maintaining high utilization of HS-DSCH cell resources.

[0034] The scheduler 46 may also take into account physical transmission requirements. For example, one user or user group may require a more robust MCS than another. During the next TTI resources may only be available for a less robust MCS. The scheduler 46 may then schedule transmissions for PtP users or PtM user groups that maximize the use of available resources. Since data available for transmission with specific QoS requirements, available physical resources and channel quality measurements change on a TTI basis, the ability to schedule within this interval improves the number of satisfied users and the overall utilization and efficient use of physical resources.

[0035] The scheduler 46 also gets ACK/NAK feedback from all users in the

reception of the transmission by sending a ACK, or a certain configured threshold is reached, or a service transmission time limit is reached or a retransmission limit is reached. The advantage of this approach is that only segments of a PtM service that are in error are retransmitted, rather than retransmitting the entire service transmission. Preferably, users that have previously generated an ACK will ignore any retransmissions.

[0036] A benefit of this approach is the ability to dynamically schedule on a TTI basis between PtP and PtM services rather than scheduling S-CCPCH with layer 3 procedures that require the order of 100s of ms to seconds for channel allocations. This offers improved QOS and physical resource management. Additionally, it allows the UE to receive multiple services without the capability for reception of simultaneous channels, since overlapping physical allocations can be avoided. The multiple services are separated by time.

[0037] The Node-B 18 signals on the CCC 13 to the UEs 12₁-12_N the channel configuration that data for UE 12₁-12_N will be sent. The preferred scheduling for each TTI reduces resource conflicts between services, by maximizing use of radio resources. This assignment of channels is signaled to the users via the downlink CCC using a signaling device 48. Without the mechanism 46, the channels typically can not be reallocated on a TTI granularity and as a consequence the ability to maintain QOS with high utilization and efficient use of physical resources is restricted.

[0038] Figures 5A and 5B are illustrations of preferred HS-DSCH signaling for the HS-DSCH 16. In Figure 5A, each UE 12₁-12_N of the PtM user group is notified of the service transmission by detecting a PtM service ID 51 associated with all users of the service. That service ID 51 is encoded on the downlink common control channel 13. After a predetermined time period, the users receive the HS-DSCH of the authorized service.

[0039] In Figure 5B, each UE 12₁-12_N is notified of the service transmission by detecting an ID associated with its group of UEs, UE group ID 1 53₁ to UE group ID N

time period, the users receive the HS-DSCH 16 indicated by the CCC 13 for a packet having a service ID of the authorized service.

[0040] Figure 6 is an illustration of preferred signals for establishment and transmissions of a point to multi-point service over HS-DSCHs. The RAN 70 signals to each user to receive the service the transport attributes of the transmission, 74. Each user configures itself for reception of the transmission and monitors the CCCs for the PtM service group ID, 72. Data to be sent for the point to multi-point service is received from the core network by the UMTS radio access network (UTRAN) 70. The service/group/UE ID on the CCC indicates that the HS-DSCH transmission will occur shortly, after a specified time period on a specified HS-DSCH physical channel. Upon reception of the CCC each user configures itself for reception of the HS-DSCH transmission.

[0041] Each user may send channel quality information to the RAN 70 with layer 3 signaling procedures, 76. The sending of the channel information is also reported on a TTI basis by physical layer signaling, 78. Using the channel quality information for all the users within each PtM user group, the RAN 70 determines appropriate MCS of HS-DSCH transmissions to each PtM user group. To illustrate, the RAN 70 would typically set the MCS at a level for reception at a desired QOS by the user having the worst reception quality. To optimize the usage of radio resources, these parameters are preferably updated every time transmission interval (TTI), although a longer time period between updates may be used.

[0042] The UTRAN 70 synchronizes the HS-DSCH allocations, 82, and each UE 12 configures the HS-DSCH reception, 84. Service data is transmitted on the HS-DSCH, 86. The service data transmitted on the HS-DSCH is received by the UE 12. After verification, the service data is forwarded to the common traffic channel. The preferred architecture allows for the flexibility for transferring common traffic channel data over shared or dedicated channels as PtM or PtP transmission. This mapping is performed for both on the transmission and reception side of the wireless interface.

[0043] Figure 7 is an illustration of the preferred channel mapping at a radio network controller 19 and UE 12. PtM data arrives at the RNC on a common traffic channel (CTCH). The CTCH is mapped onto the HS-DSCH for transfer to the user over the physical channel, HS-PDSCH. A UE 12 as illustrated here and typically multiple UEs receive the HS-DSCH transmission. UE 12 receives the HS-PDSCH and maps the HS-DSCH to the CTCH for processing by the UE 12.

* * *

CLAIMS

What is claimed is:

1. A method for transferring service data in a wireless communication system, the method comprising:

transmitting a first service identification for reception by a group of users of a cell in the system, the group of users not including all of the users of the cell;

receiving by each of the group of users the service identification;

monitoring by each of the group of users for a second service identification being transmitted over a high speed downlink shared channel (HS-DSCH);

transmitting over the HS-DSCH the service data with the second service identification; and

each of the group of users detecting the second service identification and receiving the service data of the HS-DSCH.

2. The method of claim 1 wherein the service data is being sent to a plurality of user groups, each group being sent a different first group identification over a downlink common control channel and a single service identification as the second service identification.

3. The method of claim 1 wherein each of the group of users is being sent a same first service identification over a downlink common control channel to all of the group of users.

4. A Node-B comprising:

an uplink control channel receiver for receiving block error rate information from a plurality of users of a high speed shared channel (HS-DSCH);

a modulation and code set selection device for selecting a modulation and coding set for a HS-DSCH transmission using the received block error rate

a HS-DSCH generator for producing data of the HS-DSCH transmission signal at the selected modulation and coding set and a service identification;

a downlink common control channel generator for producing a common control channel signal having a service identification; and

an antenna array for transmitting the HS-DSCH transmission signal and the downlink common control channel.

5. A Node-B comprising:

an input configured to receive point to point (PtP) and point to multi-point (PtM) data;

a scheduling mechanism for receiving the received data and scheduling the data for transmission as PtP and PtM transmissions, the PtM transmissions being sent over a high speed shared channel transmitting data to multiple users simultaneously; and

a signaling device for signaling the data schedule to users.

6. The Node-B of claim 5 wherein the scheduling is based on a data latency and data throughput requirements of the received data.

7. The Node-B of claim 5 wherein the scheduling is performed on a transmission time interval basis.

8. The Node-B of claim 5 wherein the scheduling is based on a robustness of the PtP and PtM transmissions.

9. The Node-B of claim 5 wherein the scheduling of retransmissions of PtM data is based on received acknowledgements and negative acknowledgements of all the users intended to receive the PtM data.

10. A method for transferring service data in a wireless communication system, the method comprising:

receiving data of a common traffic channel for transfer over a wireless interface;

mapping the common traffic channel to a shared channel;

transmitting the common traffic channel data through the wireless interface over the shared channel;

receiving the common traffic channel data after transmission through the wireless interface in the shared channel;

forwarding the received shared channel data to a common traffic channel.



11. The method of claim 10 wherein the mapping comprises mapping the common traffic channel to a shared transport channel.

12. The method of claim 10 further comprising selecting a common channel or a shared channel for mapping the common traffic channel to.

13. The method of claim 10 further comprising selecting a common channel, a shared channel or a dedicated channel for mapping the common traffic channel to.

14. The method of claim 10 wherein the wireless communication system is a 3GPP communication system.

15. The method of claim 10 wherein the shared channel is a high speed downlink shared channel.

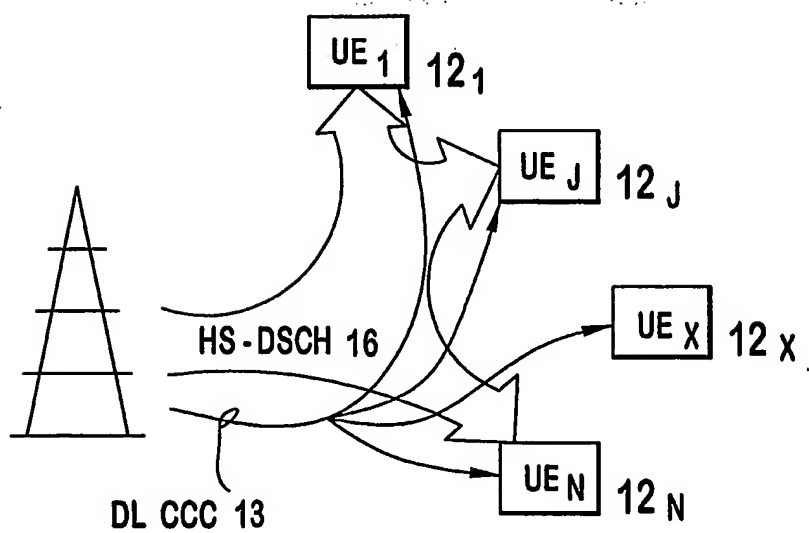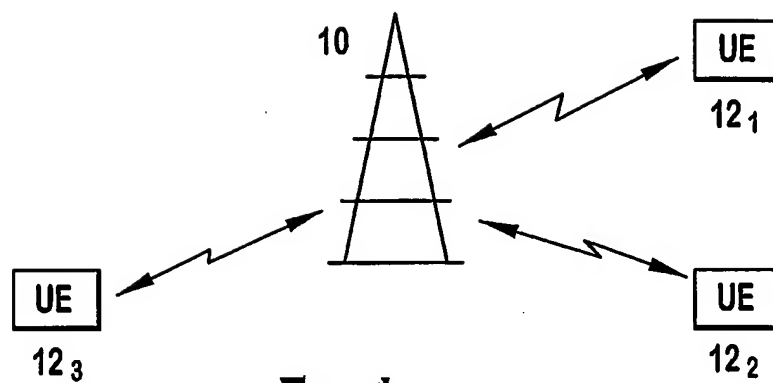

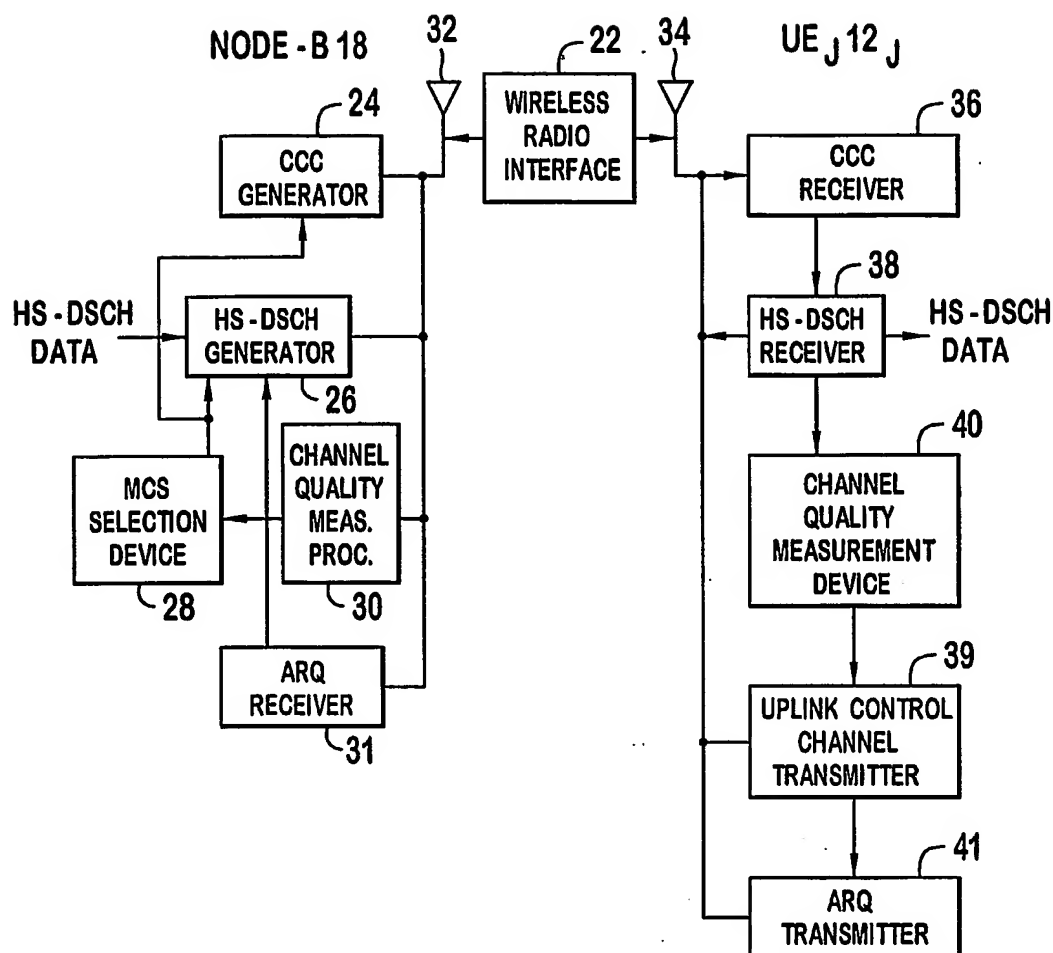


FIG. 3

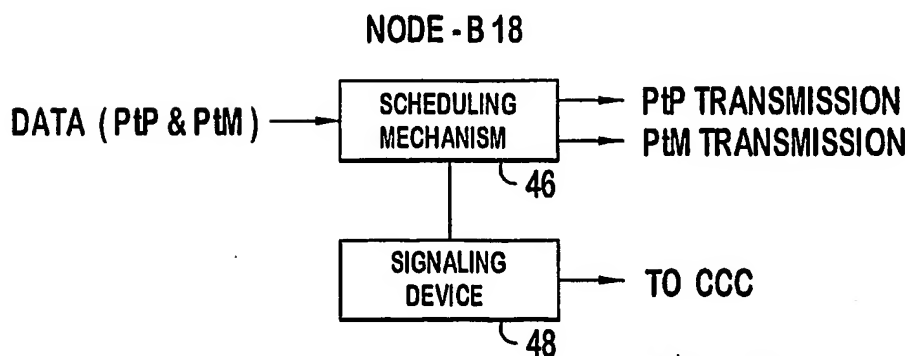


FIG. 4

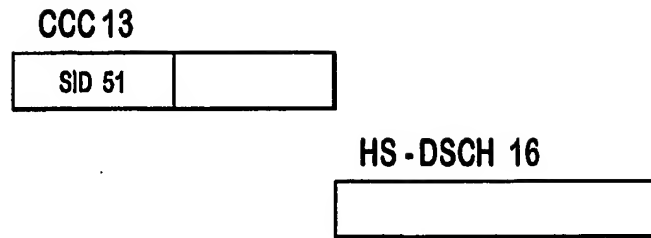


FIG. 5A

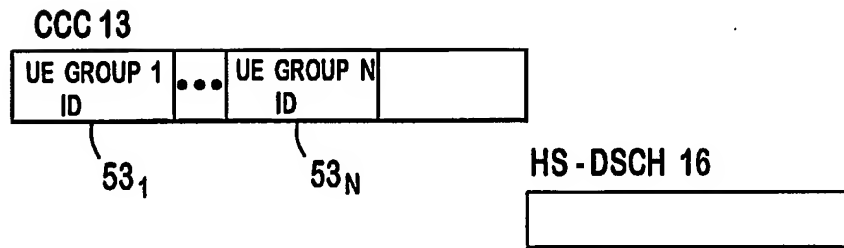


FIG. 5B

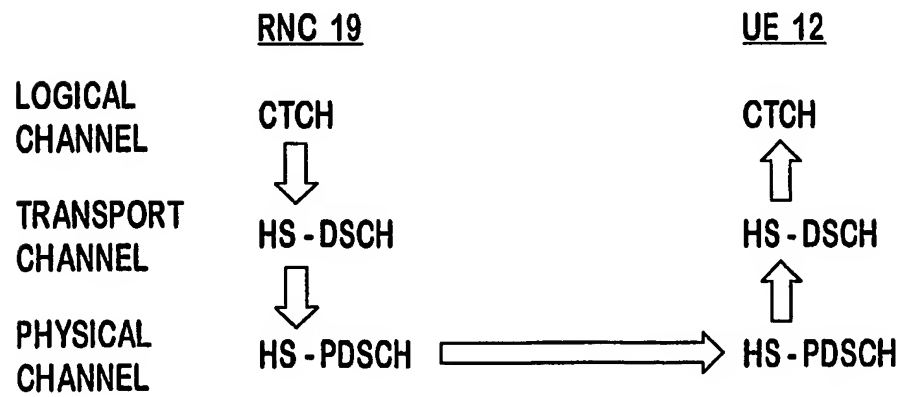


FIG. 7

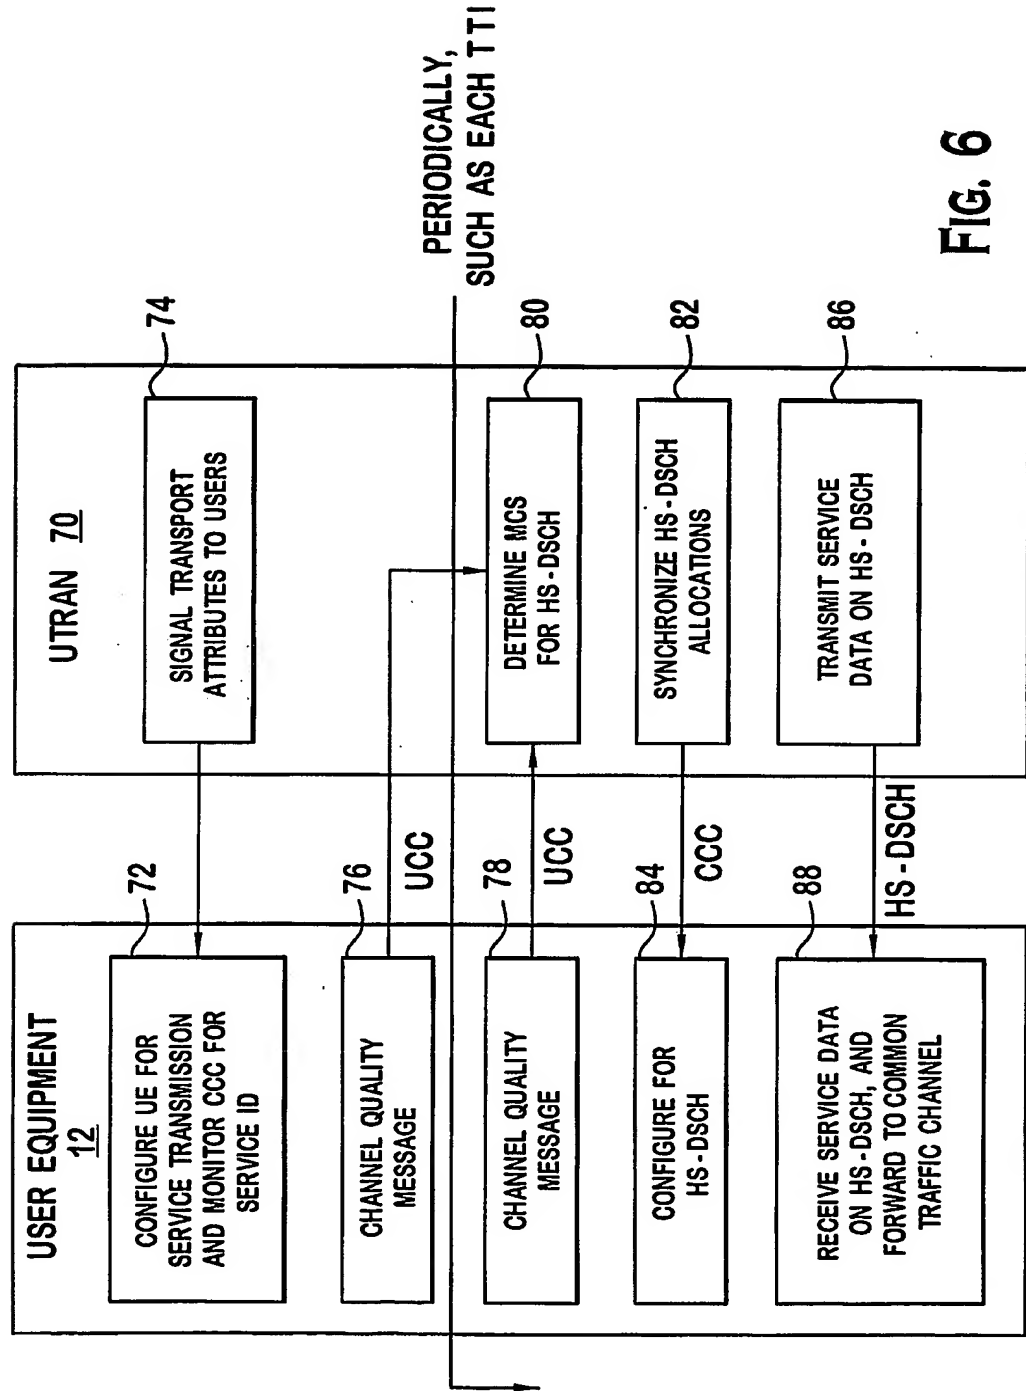


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US03/13171

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : H04Q 7/22

US CL : 455/519, 450; 370/329

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 455/518, 519, 450, 451, 452.1, 452.2, 526; 370/329, 330

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A, P	US 6,529,740 B1 (GANUCHEAU et al) 04 March 2003 (04.03.2003), column 1 line 16 through column 2 line 60, column 5 lines 25-54.	5-9
A, P	US 2002/0136193 A1 (CHANG et al) 26 September 2002 (26.09.2002), paragraph 10.	1-4, 10-15
A, E	US 2003/0123382 A1 (WANG et al) 03 July 2003 (03.07.2003), paragraph 67.	4
A, E	US 2003/0095605 A1 (DAS et al) 22 May 2003 (22.05.2003), paragraphs 16-17.	1-4, 10-15

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

* Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

24 July 2003 (24.07.2003)

Date of mailing of the international search report

19 AUG 2003

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US
Commissioner for Patents
P.O. Box 1450
Alexandria, Virginia 22313-1450

Facsimile No. (703)305-3230

Authorized officer

Ronald J Ward

Telephone No. (703)306-3616

INTERNATIONAL SEARCH REPORT

PCT/US03/13171

Continuation of Item 4 of the first sheet:

The title does not meet the requirements of PCT Rule 4.3 because it is not short and precise (preferably 2-7 words).

NEW TITLE:

Point to Multi-Point Services Using High Speed Shared Channels